

Solid LVT Range

LUXURY VINYL TILES

Add colours
to your
projects!





11 COLOUR OPTIONS AVAILABLE ON 4 CONSTRUCTIONS!

A UNIQUE DESIGN

- **2 different patterns**, LINEN a fabric inspired design and TISSE a more linear pattern available on soft colours
- **11 colour options** including a complete palette of colours: yellow, orange, red, several shades of blue, green and brown
- Available on **4 standard collections**: iD Essential 30, iD Elegance 55, Starfloor Click 30-55
- Can be produced on **a variety of formats**, including planks 121.9 x 22.9 cm and tiles 91.44 x 91.44 cm which are the standard formats
- Codes will be created on demand

A PEOPLE-FRIENDLY SOLUTION

- **Hygienic surface** treated with the Tarkett unique Top Clean XP coating that strengthens it, extends the life-cycle and simplifies cleaning and maintenance.
- Total **VOC emissions** are at least 10 times lower than Europe's strictest standards.
- Uses a **phthalate-free technology**, based on alternative plasticizers that can be used for sensitive applications such as the production of toys, food packaging and medical devices.
- Our LVT Collections are **100% Recyclable**.



2 PATTERNS

LINEN

A pattern inspired by fabric, available in 6 vivid tones of colours



LINEN Middle Blue



LINEN Dark Blue



LINEN Red



LINEN Orange



LINEN Green




LINEN Brown

TISSE


A linear pattern, available in 5 soft and pale pastel colours



TISSE Pale Yellow

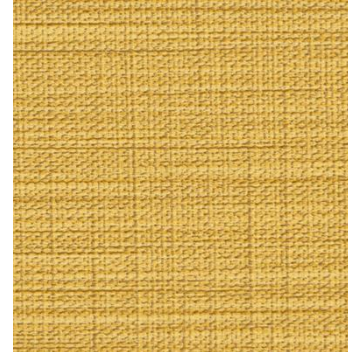


TISSE Yellow

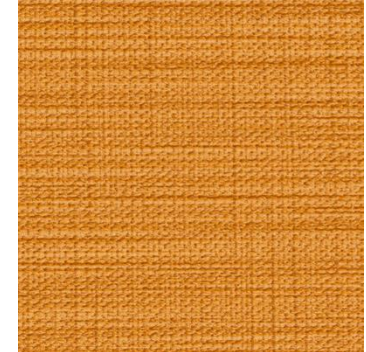

TISSE Pale Orange



TISSE Pale Green

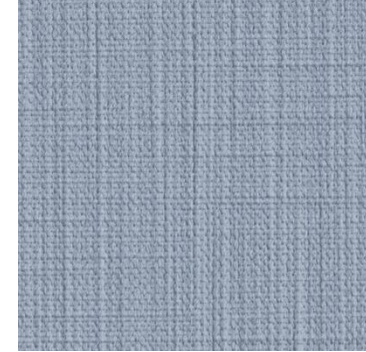

TISSE Pale Blue

Technical Datasheet

Classification	Standards	iD Essential 30	iD Elegance 55	Starfloor Click 30	Starfloor Click 55
Classification	EN ISO 10582:2010	Heterogeneous PVC Compact floor covering			
	EN ISO 10874	Domestic: 23 Commercial: 31	Domestic: 23 Commercial: 33	Domestic: 23 Commercial: 31	Domestic: 23 Commercial: 33
Wear Layer binder content	EN ISO 10582	Type I			
Technical characteristics					
Total thickness	EN ISO 24346	2.00 mm	2.50 mm	4.00 mm	5.00 mm
Wear layer thickness	EN ISO 24340	0.30 mm	0.55 mm	0.30 mm	0.55 mm
Total weight	EN ISO 23997	3400 g/m ²	4360 g/m ²	7400 g/m ²	9200 g/m ²
Bevelled edges	-	No (possible as special)		Microbevels	
Surface treatment (PUR)	-	Yes – TopClean			
Form of delivery	EN ISO 24342	12 planks / box (3.34m ²)	10 planks / box (2.79m ²)	9 planks / box (2.01m ²)	7 planks / box (1.56m ²)
Planks	Glue Down: 22.9 x 121.9 cm	72 boxes/pallet (240 m ²)	72 boxes/pallet (201 m ²)	60 boxes/pallet (121 m ²)	60 boxes/pallet (94 m ²)
	Click: 18.3 x 122 cm	24 planks / box (3.34m ²)			
	Glue Down: 15.24 x 91.44 cm	66 boxes/pallet (240 m ²)			
Tiles	Glue Down: 30.5 x 61 cm	18 tiles / box (3.34m ²)	14 tiles / box (2.9m ²)	9 tiles / box (1.68m ²)	9 tiles / box (1.68m ²)
	Click: 31 x 60.05 cm	64 boxes/pallet (240 m ²)	64 boxes/pallet (186 m ²)	76 boxes/pallet (128 m ²)	76 boxes/pallet (128 m ²)
Technical performance					
Dimensional stability	EN ISO 23999	≤ 0.25 %		≤ 0.10 %	
Curl resultant to heat 6h at 80°C	EN ISO 23999	≤ 2.00 mm			
Reaction to fire	EN 13501-1	Bfl-s1 glued over A2fl or A1fl substrate (concrete)			
Residual Indentation	EN ISO 24343-1 (EN 433)	Required value: ≤ 0.10 mm Average measured value: 0.03 mm		Required value: ≤ 0.10 mm Average measured value: 0.08 mm	
Furniture leg	EN 424	No damage			
Castor chair	ISO 4918 (EN 425)	No damage - 25000 cycles			
Thermal resistance	EN ISO 10456	0.07 m ² . K/W	0.03 m ² . K/W	0.03 m ² . K/W	0.04 m ² . K/W
Underfloor heating	EN ISO 10456	Suitable – max. 27°C			
Impact sound reduction	EN ISO 140-8 EN ISO 717/2	ΔLw = 2 dB		ΔLw = 3 dB	
Light fastness	EN ISO 105-B02	≥ 6			
Resistance to chemicals	EN ISO 26987 (EN 423)	Good resistance			
Slip resistance	DIN 51130 EN 13893	μ _s ≥ 0.30 R9			
Electrical properties	EN 1815 EN 1081	< 2 kV on concrete R1 > 1 10 ⁹ Ω		< 2 kV on concrete R1 > 1 10 ⁹ Ω	
Total VOC emissions	ISO 16000-9	≤ 100 μg/m ³			
Installation	-	Glue down		Click	
Colours	-	Wood: 28 - Ceramic: 10	Wood: 30 - Ceramic: 11	Wood: 18 - Ceramic: 12	


The above information is subject to modification for the benefit of further improvement (10/2022).
For the latest information, please visit our website: www.Tarkett-asia.com
Tarkett's instructions regarding installation, cleaning and maintenance should be observed.






Smart Ideas



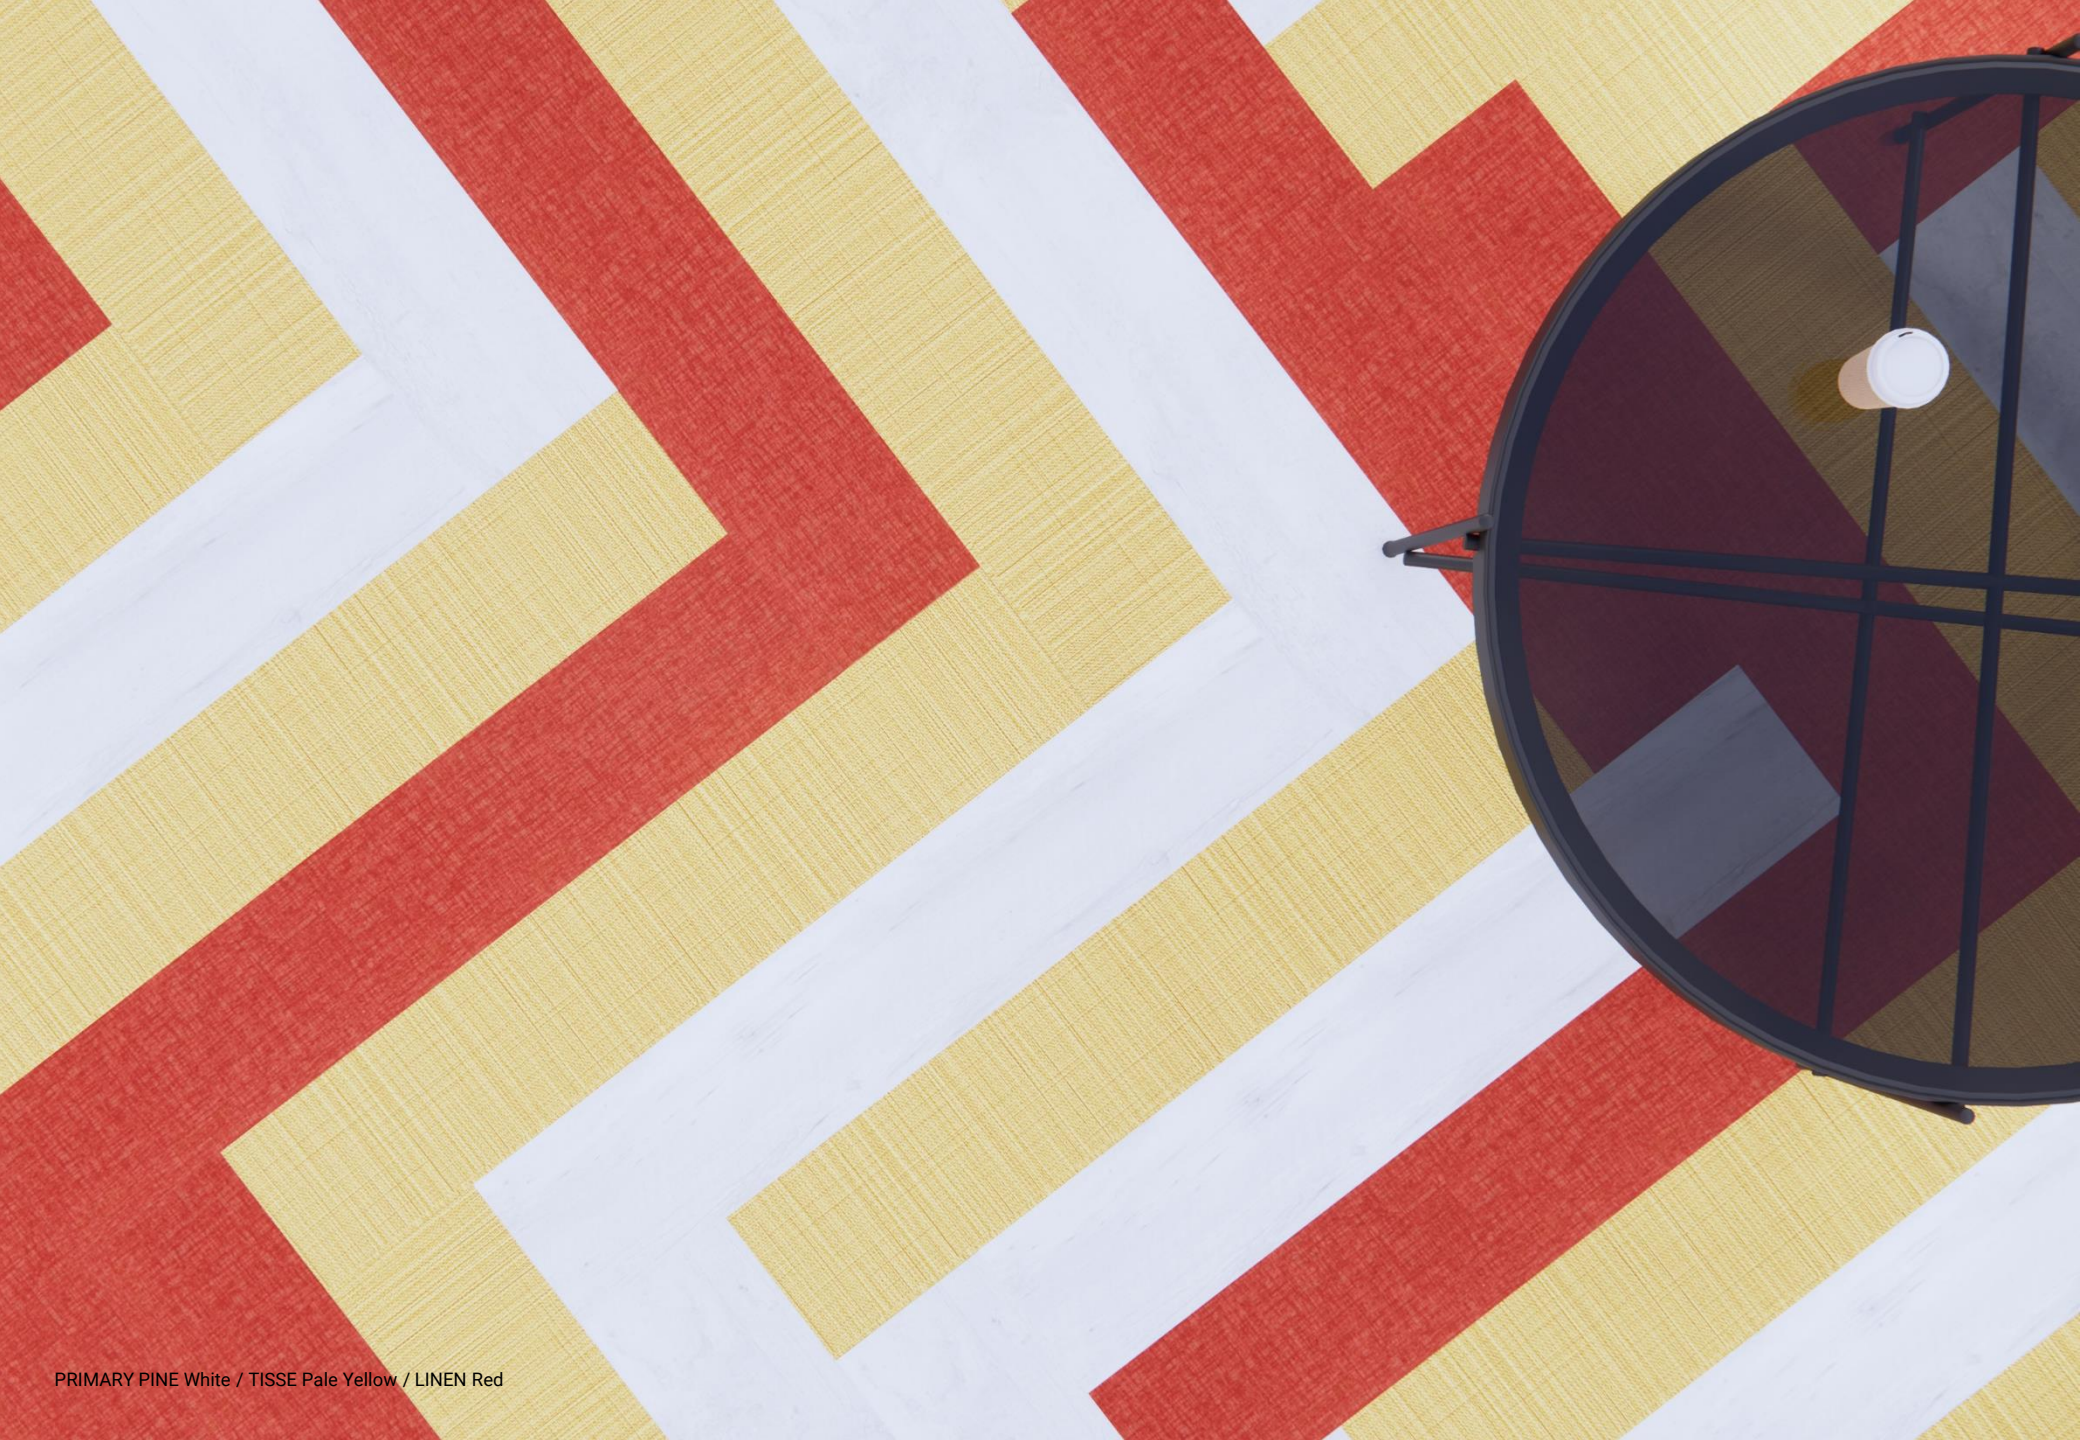



PRIMARY PINE White / TISSE Pale Yellow / LINEN Red



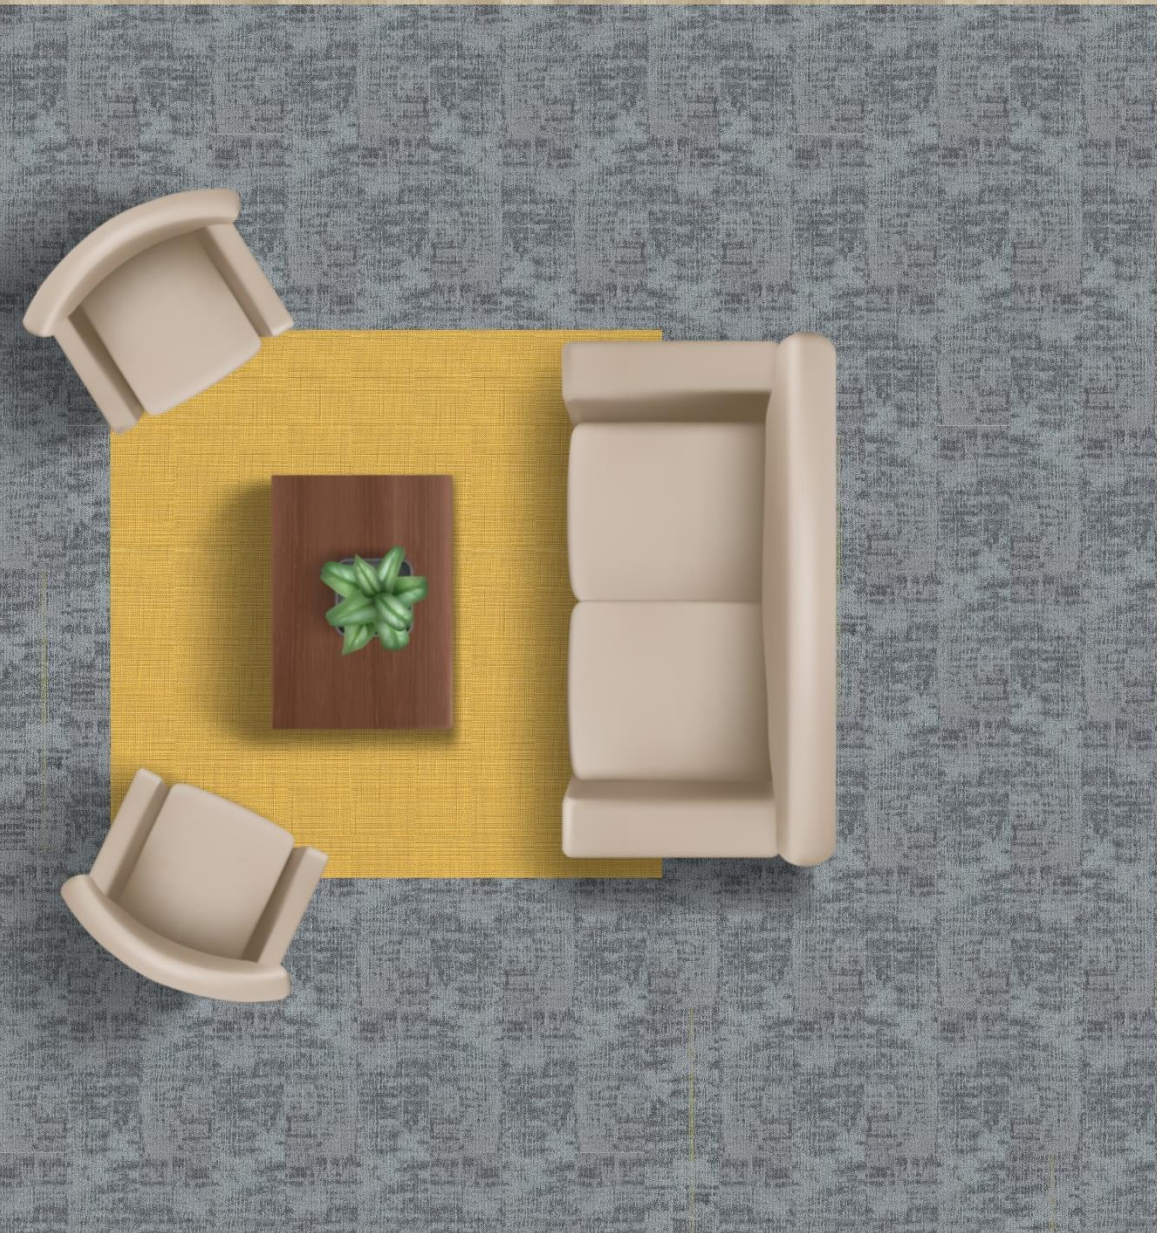

LINEN Red / TISSE Orange / TISSE Yellow / TANDUS DOMINO Steel Gray

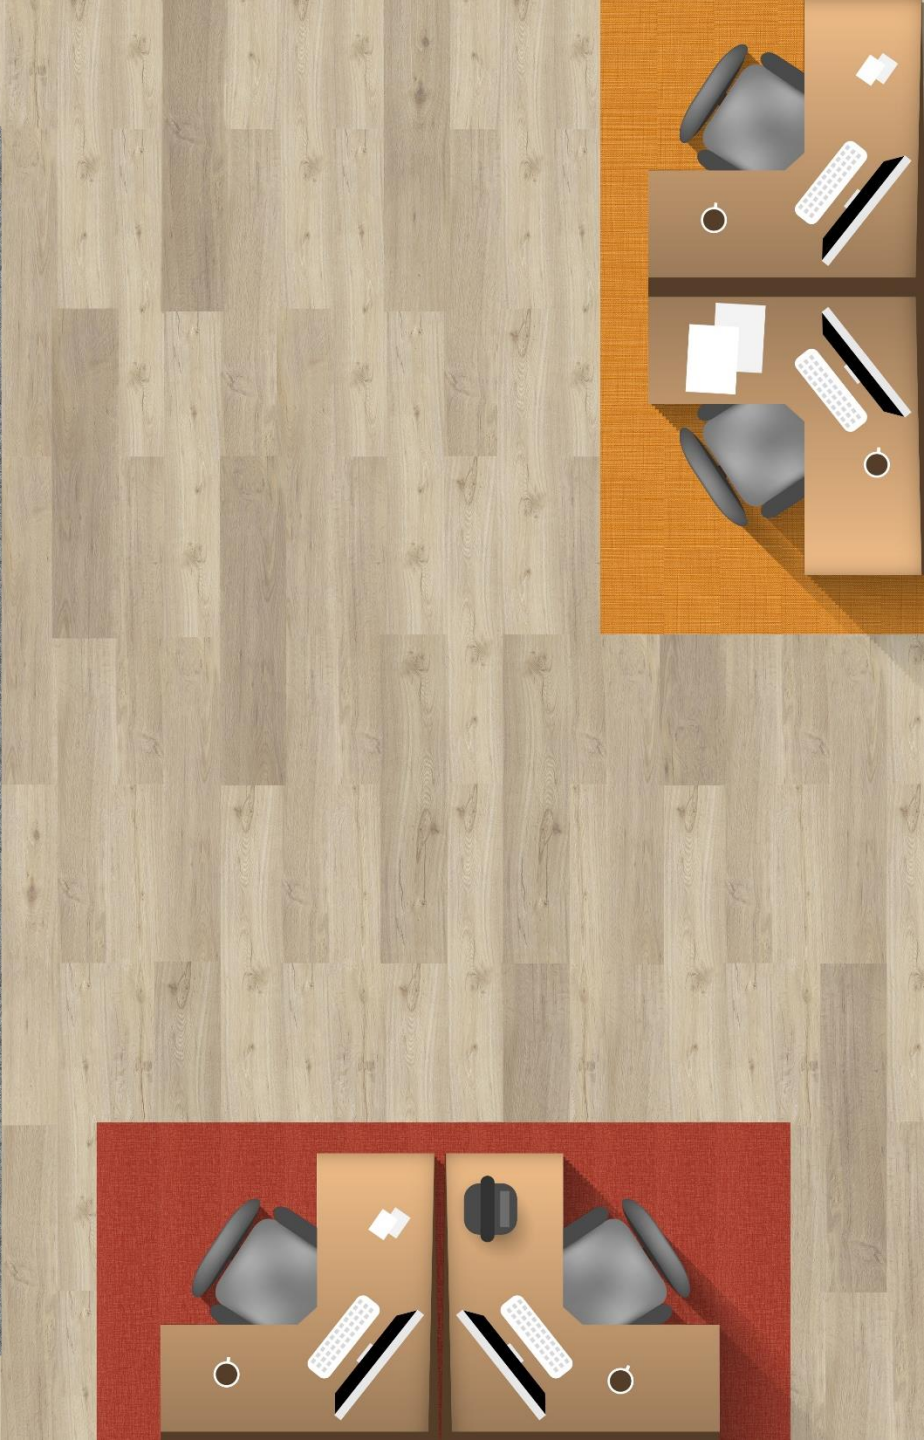



ANH NGOC THANH TRADING COMPANY LIMITED (ANTRADE CO., LTD.)

HCM office: R. 5.03, 5th Fl., Phuong Tower,
31C Ly Tu Trong Str., Ben Nghe W., Dist. 1, HCMC.
Tel: (+84) 28 38257622 / 28 38257623

HN office: R. 701, 7th Fl., 131 Bui Thi Xuan Str.,
Hai Ba Trung District, Ha Noi City, Vietnam.
Tel: (+84) 24 63289487 / 24 39749263

Website: www.antrade.vn

Hotline: +84 933 662138

Email: sales@antrade.vn