



WINTER PINE smoke 057

Topaz 70 offers a refined collection of warm and natural decors in wood, concrete and ceramic designs to create a reassuring and home-like environment. The range also provides good performance in areas where slip resistance is key. Topaz 70 enhances visual perception and well-being of aged care residents as over 50% of the range colors have a LRV* between 20–40%. Topaz 70 is available in 2, 3, and 4 meter formats, allowing for seamless installation to suit any space.

phthalate free
100%

30 decors

LRV* between
20 – 40%
For visual comfort

2m, 3m, 4m
rolls for installation
flexibility



Residual indentation
to acoustic ratio
0.05** mm / 13dB



Traffic & slip resistance
0.70 mm wearlayer
R10 slip resistance



Easy maintenance
TopClean™ PUR
No wax, no polish

*Light Reflective Value / **Best measured value

Topaz 70

TECHNICAL DATA	STANDARD	TOPAZ 70
CLASSIFICATION		
Classification	EN ISO 10582 EN ISO 10874	Heterogeneous compact floor covering based on polyvinyl chloride Commercial: 34 / Industrial: 43
Wear layer binder content	EN ISO 10582	Type I
TECHNICAL CHARACTERISTICS		
Wear layer thickness	EN ISO 24340	0.70 mm
Total thickness	EN ISO 24346	2.50 mm
Total weight	EN ISO 23997	2900 g/m ²
PU treatment	EN ISO 23997	TopClean™
Form of delivery	EN ISO 24341 (rolls)	Approx. 24 running metres x 200 cm / Art. no. 5626 ___ 3 digit colour number Approx. 24 running metres x 300 cm / Art. no. 5625 ___ 3 digit colour number Approx. 24 running metres x 400 cm / Art. no. 5624 ___ 3 digit colour number

PERFORMANCES FOR CE MARKING REQUIREMENTS (EN 14041)		
Declaration of Performance	EN 14041	0131-0022-DOP-2018-10
Reaction to fire	EN 13501-1	Cfl-s1
Electrostatic properties	EN 1815	≤ 2 kV on concrete
Thermal resistance	EN ISO 10456	0.02 m ² K/W
Slip resistance	EN 13893	μ ≥ 0.3

TECHNICAL PERFORMANCES		
Residual indentation	ISO 24343-1 - EN 433	≤ 0.10 mm
Impact sound reduction	NF EN ISO 717 / 2	ΔL _w = 13 dB
Slip resistance ⁽¹⁾	DIN 51130	R10
Furniture leg	EN 424	No damage
Castor chair	ISO 4918	No damage
Curl resultant to heat	EN ISO 23999	≤ 8 mm
Light fastness	EN ISO 105-B02	≥ 6
Dimensional stability	EN ISO 23999	≤ 0.10%
Chemical resistance	EN ISO 26987	Not affected (0)
Underfloor heating		Suitable

ENVIRONMENTAL PERFORMANCES		
Total VOC emissions	ISO 16000-9	≤ 100 µg/m ³ (after 28 days)
COLOURS		
30		

The above information is subject to modification for the benefit of further improvement. (11/18).
According to the European Regulation N° 305/2011 for CE Marking, the Declarations of Performance are available on our website www.tarkett.com
Tarkett's instructions regarding installation, cleaning and maintenance should be observed. Please contact Tarkett at the address shown for these instructions.



Colour N°	Welding rods N°	NCS N°	LRV	Colour N°	Welding rods N°	NCS N°	LRV	Colour N°	Welding rods N°	NCS N°	LRV	Colour N°	Welding rods N°	NCS N°	LRV
005	1287 505	S 4020-Y10R	22.06%	021	1287 447	S 4005-Y20R	28.88%	046	1287 402	S 2005-Y30R	43.34%	070	1288 341	S 3005-B80G	37.96%
015	1287 183	S 6000-N	16.77%	027	1289 538	S 4010-Y10R	29.79%	057	1291 839	S 4005-Y50R	32.01%	064	1287 830	S 4005-Y50R	23.46%
016	1294 209	S 3020-Y20R	38.24%	030	1287 475	S 3005-Y20R	16.73%	058	1287 889	S 3005-Y20R	32.47%	065	1287 585	S 5502-Y	41.0%
017	1287 289	S 4020-Y10R	18.16%	032	1287 878	S 3010-Y20R	23.42%	059	1287 833	S 3005-Y20R	29.95%	067	1287 374	S 3905-Y	36.68%
018	1292 455	S 2005-Y10R	51.22%	044	1287 378	S 4010-Y30R	27.48%	061	1287 830	S 4005-Y20R	32.95%	068	1291 839	S 4005-Y20R	31.75%
020	1287 278	S 3502-Y	26.95%	045	1287 012	S 3005-Y20R	40.66%	062	1287 690	S 5020-Y20R	27.59%	069	1287 385	S 5030-R80B	17.86%

■ WESTERN EUROPE: Austria: Tarkett Holding GmbH, Niederlassung Wien – Tel. +43 1 47 88 062 • Belgium: Tarkett Belux Sori – Tel. +32 16 35 98 80 • Denmark: Tarkett A/S – Tel. +45 43 90 60 11 • Finland: Tarkett Oy – Tel. +358 9 4257 9000 • France: Tarkett SAS – Tel. +33 1 41 20 42 49 • Germany: Tarkett Holding GmbH, Bereich Objekt – Tel. +49 62 33 810 • Greece: Tarkett Monoprosopi Ltd – Tel. +30 210 6745 340 • Italy: Tarkett S.p.A. – Tel. +39 0744 7551 • Luxembourg: Tarkett GDL SA – Tel. +352 949 211 8804 • Netherlands: Tarkett Holding GmbH, Vesting Nederland – Tel. +31 416 685 491 • Norway: Tarkett AS – Tel. +47 32 20 92 00 • Portugal: Tarkett SA – Tel. +351 21 427 64 20 • Spain: Tarkett Floors S.L. – Tel. +34 91 325 08 57 • Sweden: Tarkett Sverige AB – Tel. +46 771 29 19 00 • Switzerland: Tarkett Holding GmbH, Bereich Objekt Schweiz – Tel. +41 545 233 7 24 • Turkey: Tarkett Kappen – Tel. +90 212 213 85 80 • United Kingdom: Tarkett Ltd – Tel. +44 (0) 1932 854 0400 • EASTERN EUROPE: Baltic Countries: Tarkett Baltics – Tel. +370 272 923 220
• Czech Republic: Tarkett org. s.r.o. – Tel. +420 271 001 600 • Hungary: Tarkett Polska SP. z o.o. / Magyarország: Tarkett Kft. – Tel. +36 1 437 8150 • Poland: Tarkett Polska Sp. z o.o. – Tel. +48 22 16 09 231 • Russian Federation: ZAO Tarkett RUS – Tel. +7 495 775 3737
• Slovakia: Tarkett Polska, orientácia slovenska – Tel. +421 2 46291 371 • South East Europe: Tarkett SEE – Tel. +381 21 7571 649 (44) 559 12 21 • Middle East: Tarkett UAE – Tel. +971 4 44 569 82 21 • ASIA AND OCEANIA: Australia: Tarkett Australia Pty Ltd. – Tel. +61 8 88 53 12 00
• China: Tarkett Floor Covering (Shanghai) Co., Ltd. – Tel. +86 (21) 50 95 88 38 ext 841 • North East Asia: Tarkett Hong Kong Limited – Tel. +852 2511 8715 • India: Tarkett Flooring India Pvt. Ltd. – Bangalore – Tel. +91 80 4130 3793 – New Delhi – Tel. +91 11 4352 4073 – Mumbai – Tel. +91 22 2648 8750 • South East Asia: Tarkett Flooring Singapore Pte. Ltd. – Tel. +65 6346 1585 ■ AFRICA: Tarkett International: Tel. +33 1 41 20 41 01 ■ MIDDLE EAST: Tarkett Middle East: Tel. +961 1 51 3363/4 • Israel: Tarkett International: Tel. +33 1 41 20 41 01
■ NORTH AMERICA: USA: Tarkett Inc. – Tel. +1 718 859 9811 / Johannesburg – Tel. +1 440 543 8916 • Canada: Tarkett Inc. – Tel. +1 450 293 1711 ■ LATIN AMERICA: Brazil: Tarkett – Tel. +55 12 3954 7105 • Argentina • Chile • Uruguay: Tarkett Latam Mercosur – Tel. +54 11 47 08 07 72 / +54 9 11 44 46 88 82 • Bolivia • Colombia • Ecuador • Panama • Paraguay • Peru • Trinidad and Tobago • Venezuela: Tarkett – Tel. +58 11 9 8410 9310 / +58 11 95494 0069 • Mexico / Central America: Tarkett Latam Mexico – Tel. +52 11 98410 9310



ANH NGOC THANH TRADING COMPANY LIMITED (ANTRADE CO., LTD.)
HCM Office: R. 5.03, 5th FL, Phuong Tower, 31C Ly Tu Trong Str., Ben Nghe W., Dist. 1, HCMC. Tel: (+84) 28 38257622 / 28 38257623
HN Office: R. 701, 7th FL, 131 Bui Thi Xuan Str., Hai Ba Trung District, Ha Noi City, Vietnam. Tel: (+84) 24 63289487 / 24 39749263
 Website: www.antrade.vn Hotline: +84 933 662138 Email: sales@antrade.vn



Printed on 100% recycled paper and cardboard - ♻️ recyclable

CUSTOMERS: 0000 - 11/18

Topaz 70 - 206001 0000 - 11/18

Tarkett

Topaz 70

phthalate free
100%



ROLL

Topaz 70


HETEROGENEOUS COMPACT VINYL

For a perfect
balance
of comfort
and resistance




CLIC grey 020

Topaz 70

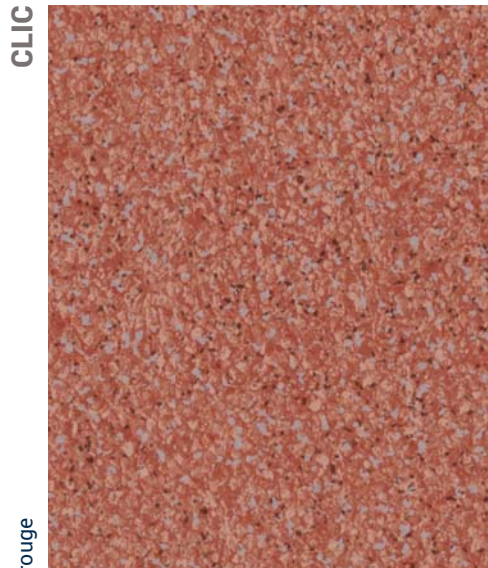


CLIC
rouge
2m 5626 017
3m 5625 017
4m 5624 017

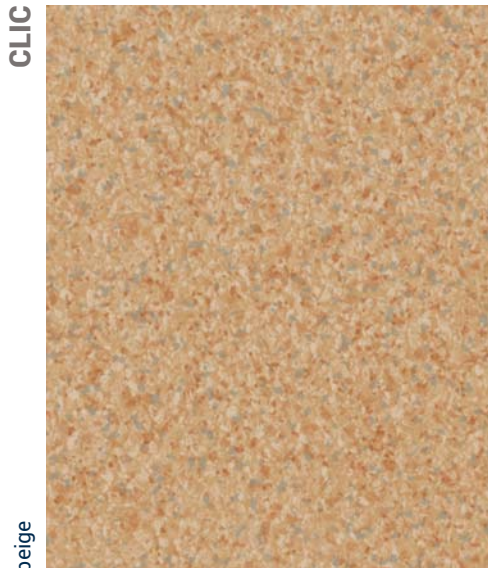


CLIC
beige
2m 5626 016
3m 5625 016
4m 5624 016



CLIC
grege
2m 5626 021
3m 5625 021
4m 5624 021

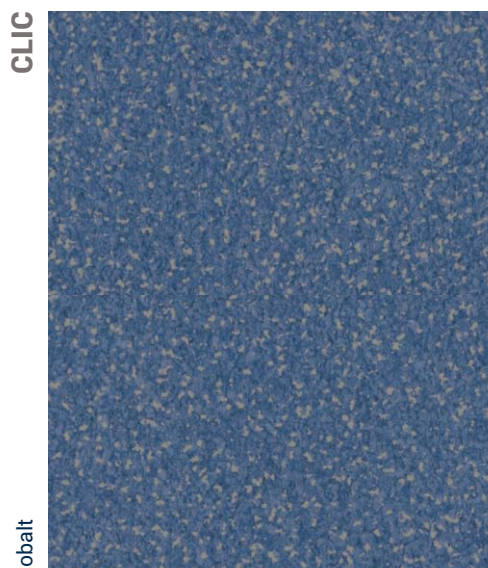

CLIC
cobalt
2m 5626 069
3m 5625 069
4m 5624 069

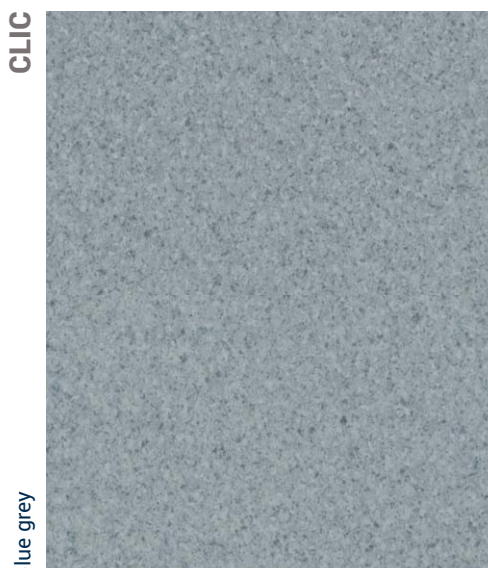

CLIC
blue grey
2m 5626 070
3m 5625 070
4m 5624 070



CLIC
clair
2m 5626 018
3m 5625 018
4m 5624 018



CLIC
noir
2m 5626 015
3m 5625 015
4m 5624 015



CLIC
grey
2m 5626 020
3m 5625 020
4m 5624 020




CLIC
warm grey
2m 5626 071
3m 5625 071
4m 5624 071




WARM OAK
light grey
2m 5626 058
3m 5625 058
4m 5624 058
Plank size: 100 x 16.6 cm



WARM OAK
strong brown
2m 5626 075
3m 5625 075
4m 5624 075
Plank size: 100 x 16.6 cm

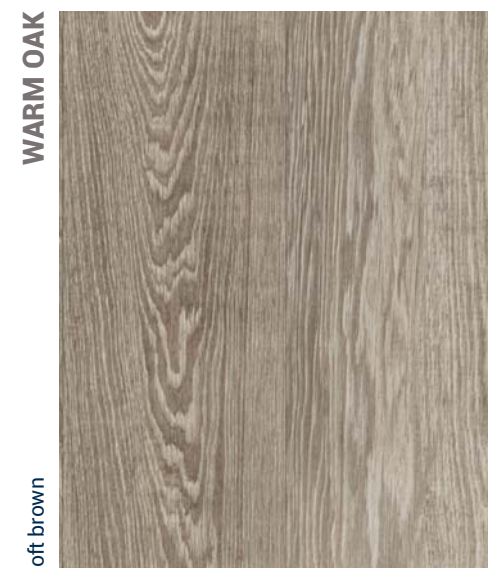


WARM OAK
soft brown
2m 5626 046
3m 5625 046
4m 5624 046
Plank size: 100 x 16.6 cm

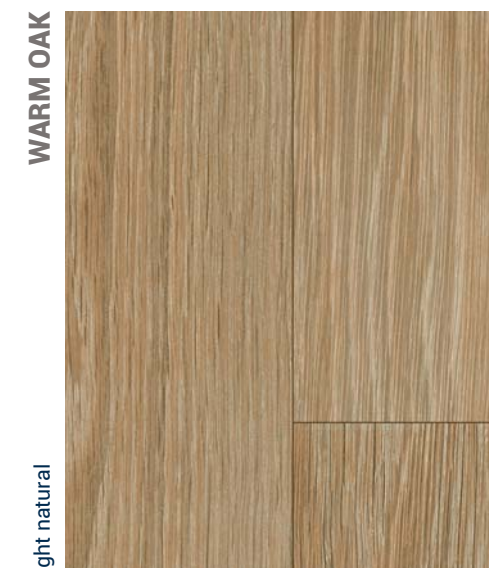

WARM OAK
light natural
2m 5626 059
3m 5625 059
4m 5624 059
Plank size: 100 x 16.6 cm



ANTI K OAK
light brown
2m 5626 005
3m 5625 005
4m 5624 005
Plank size: 100 x 10 cm

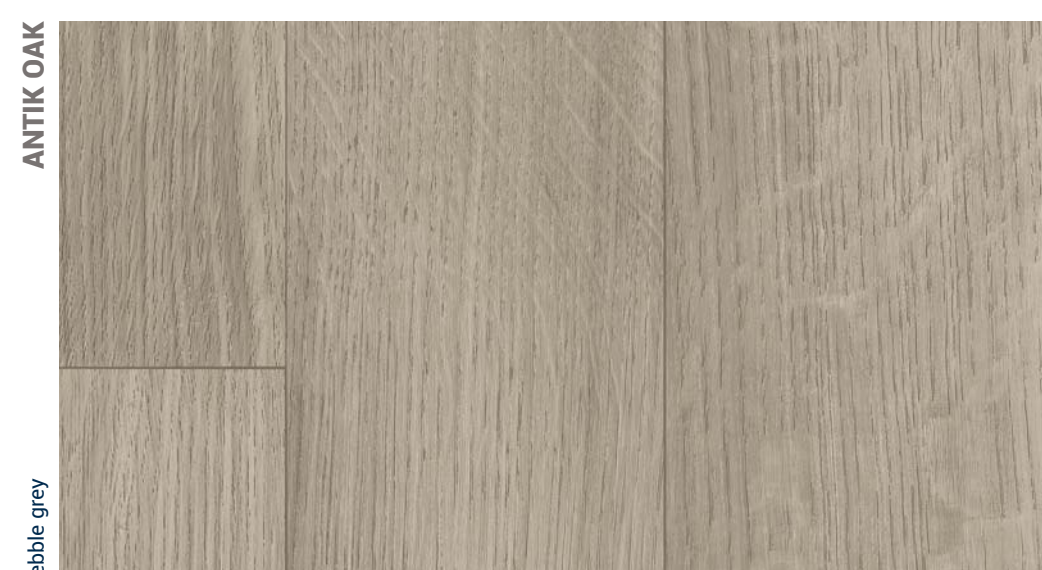

ANTI K OAK
pebble grey
2m 5626 061
3m 5625 061
4m 5624 061
Plank size: 100 x 10 cm



ANTI K OAK
light natural
2m 5626 027
3m 5625 027
4m 5624 027
Plank size: 100 x 10 cm

Topaz 70



ARCADIA
brown natural
2m 5626 030
3m 5625 030
4m 5624 030
Plank size: 100 x 16.6 cm




ARCADIA
light yellow
2m 5626 032
3m 5625 032
4m 5624 032
Plank size: 100 x 16.6 cm



WOOLLAND OAK
grey
2m 5626 064
3m 5625 064
4m 5624 064
Plank size: 100 x 16.7 cm



WOOLLAND OAK
natural
2m 5626 062
3m 5625 062
4m 5624 062
Plank size: 100 x 16.7 cm

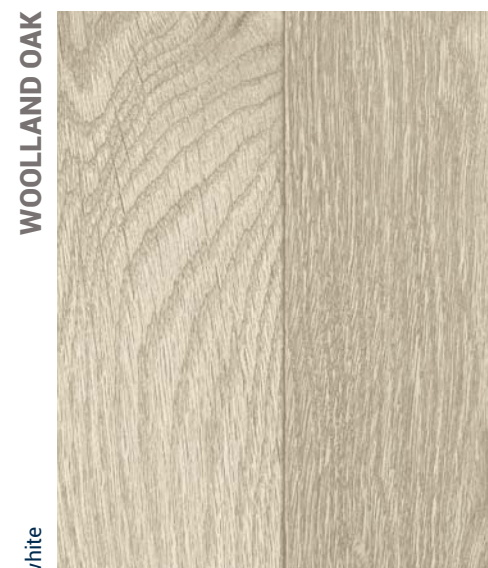

WOOLLAND OAK
white
2m 5626 063
3m 5625 063
4m 5624 063
Plank size: 100 x 16.7 cm



WINTER PINE
soft natural
2m 5626 044
3m 5625 044
4m 5624 044
Plank size: 100 x 20 cm



WINTER PINE
pebble grey
2m 5626 074
3m 5625 074
4m 5624 074
Plank size: 100 x 20 cm



BALDOSA
slate grey
2m 5626 072
3m 5625 072
4m 5624 072



STENCIL CONCRETE
black
2m 5626 065
3m 5625 065
4m 5624 065




BALDOSA
grege
2m 5626 073
3m 5625 073
4m 5624 073



STENCIL CONCRETE
brown
2m 5626 068
3m 5625 068
4m 5624 068



WINTER PINE
soft beige
2m 5626 045
3m 5625 045
4m 5624 045
Plank size: 100 x 20 cm

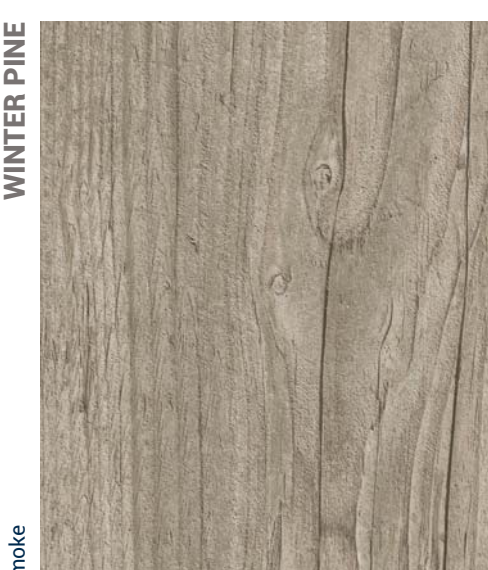

WINTER PINE
smoke
2m 5626 057
3m 5625 057
4m 5624 057
Plank size: 100 x 20 cm



STENCIL CONCRETE
light grey
2m 5626 067
3m 5625 067
4m 5624 067

